

COMMERCIAL

Infrared Automatic Basin Spout

Product Specification

Product Code:

Finish:

Product Type:

Construction:

Power Supply:

Water Supply:

Working Pressures:

IRBS2-CP

Chrome

Commercial

Body is of brass construction

AC: 220V-240V, 50/60HZ

DC: 6V (4x AA alkaline batteries (not supplied)

Suitable for high pressure systems


Min 1.0bar, Max 5.0bar

Maximum Static Pressure: 10.0 bar



Additional Information

- 55 seconds (± 5 seconds) timed flow.
- 23-26cm sensing range.
- Power consumption: Static <0.3MW Active: <3MW.
- Inlet water supply temperature range: 5°C - 45°C.
- Battery override
- Low battery warning light
- Water efficient – Water will only flow when the hands are in the sensing range

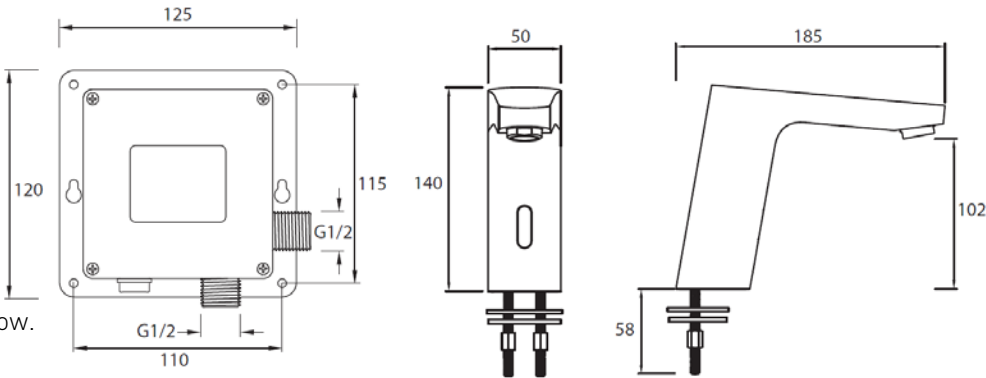

Technical Advice:

Guarantee:

For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

1 year covering manufacturing faults.

Compliance / Approvals

BREEAM Compliant

WRAS Approved: Certificate Number: 1412971

Flow Rates (litres per minute)

SystemPressure	0.5bar	1bar	2bar	3bar	4bar	5bar
	2.2	3.8	4.9	4.8	5.1	5.3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

